# Multi-class Multi-modal Misinformation Detection with Concatenation-based Architecture and Variational Autoencoder

Sara Abdali-Georgia Institute of Technology

sabdali3@gatech.edu


#### Introduction

- Social media platforms are evolving from text-based forums into multi-modal environments and consequently the nature of misinformation in social media is changing accordingly.
- Misinformation spreaders have recently targeted contextual correlations between modalities e.g., text and image. Thus, many research efforts have been put into development of automatic techniques for detecting possible cross-modal discordances in web-based media. However, there are still limitations in detecting multimodal misinformation.

## Limitations


- d Recent studies on multi-modal learning have made significant contributions to the d field of multi-modal fake news detection.
- hare are still weaknesses which recognizing them opens the door to new har


opportunities.

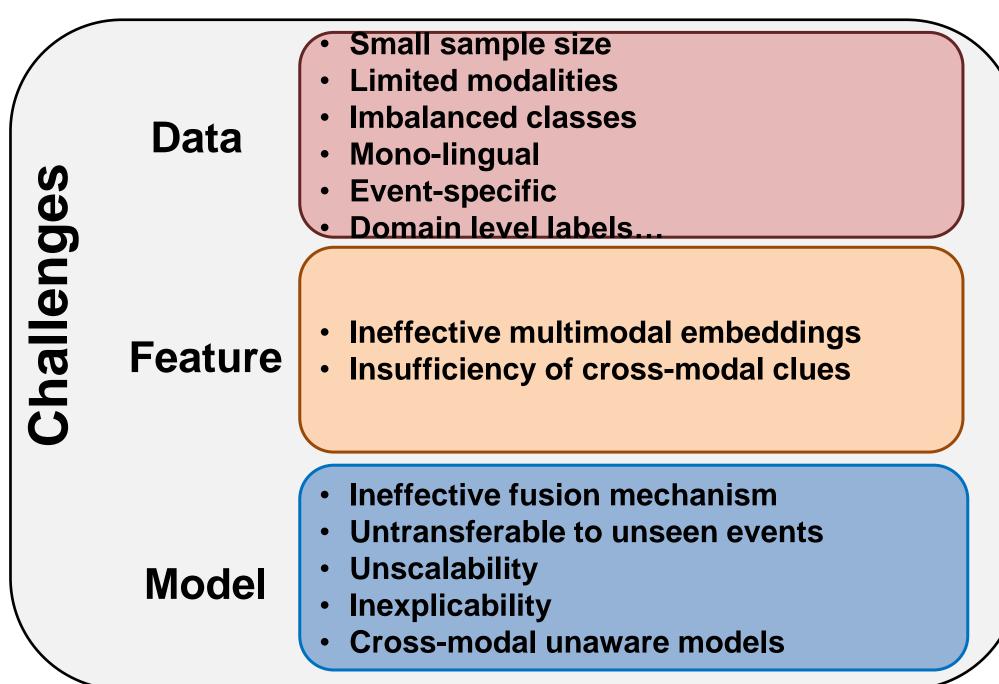

### Our VAE based architecture

- ❖ We use a variational autoencoder as our generative model.
- \* we use BERT for encoding texts and Inception version3 for encoding images.

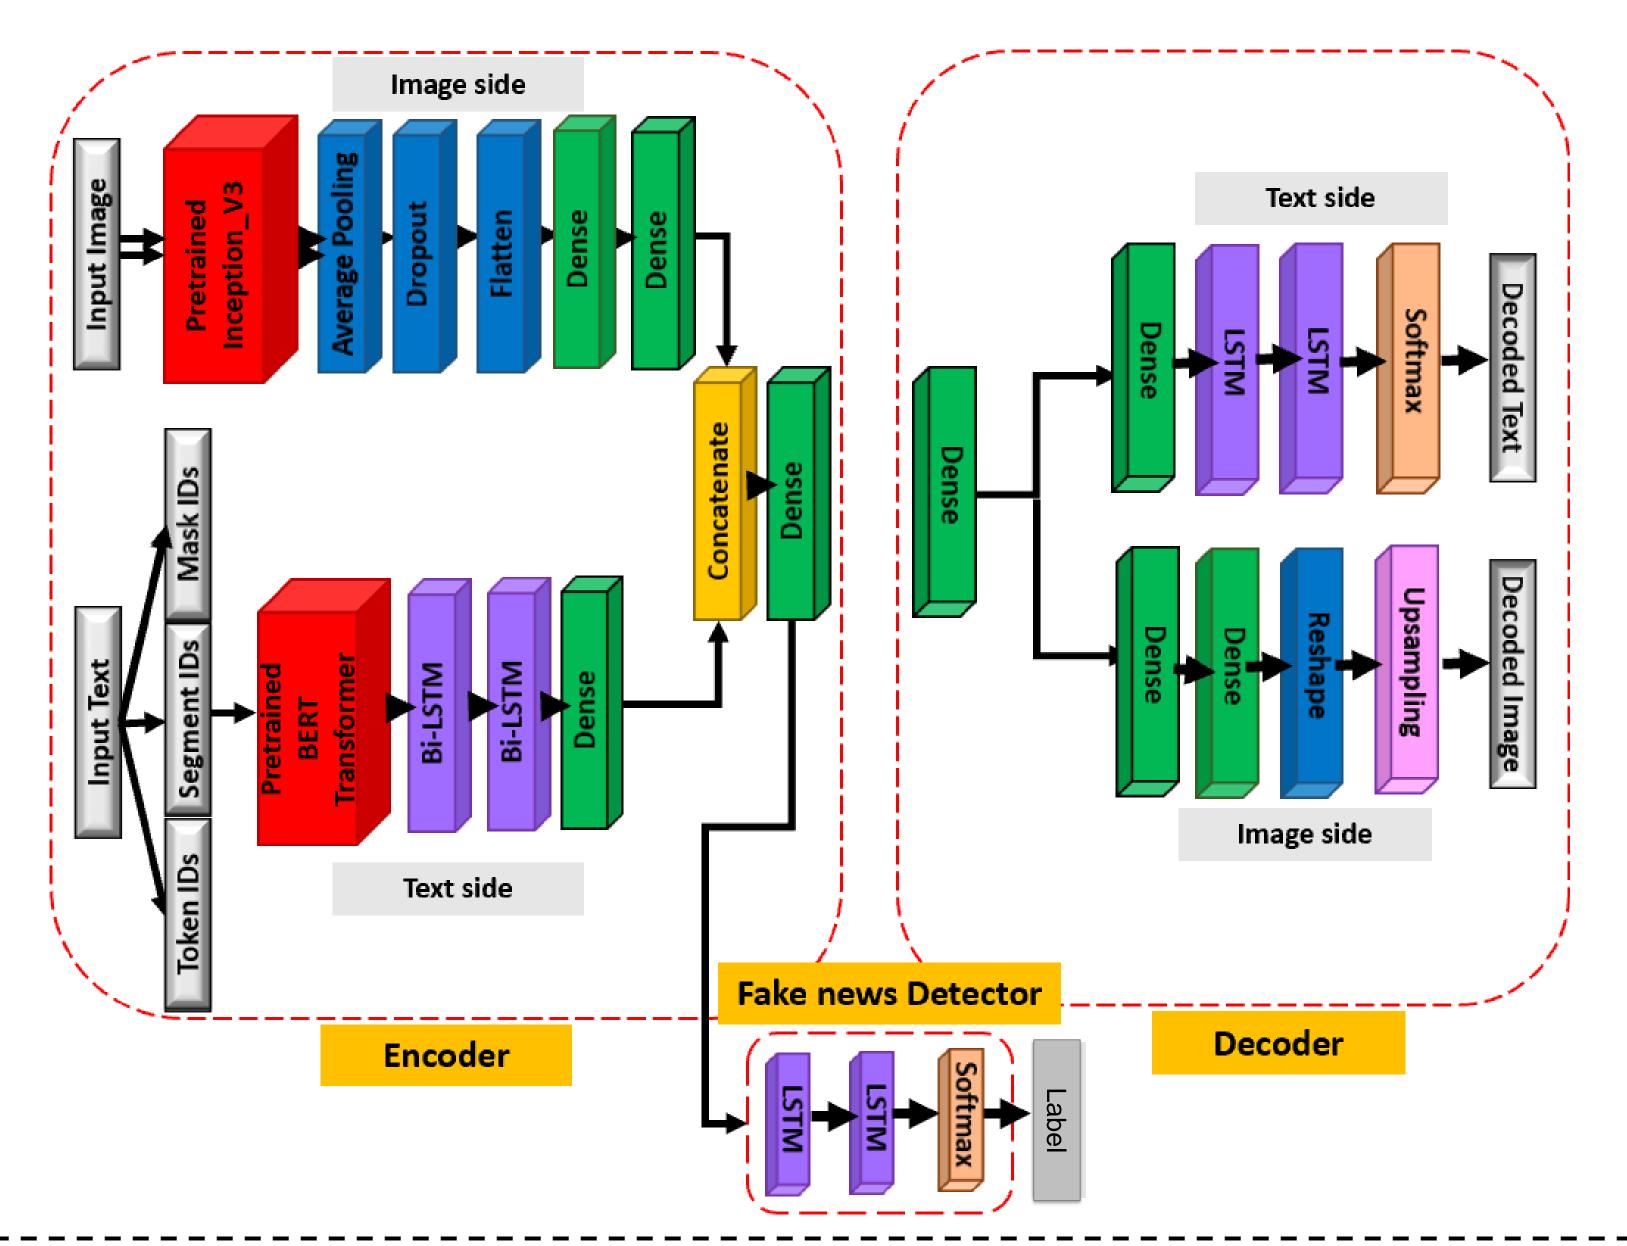

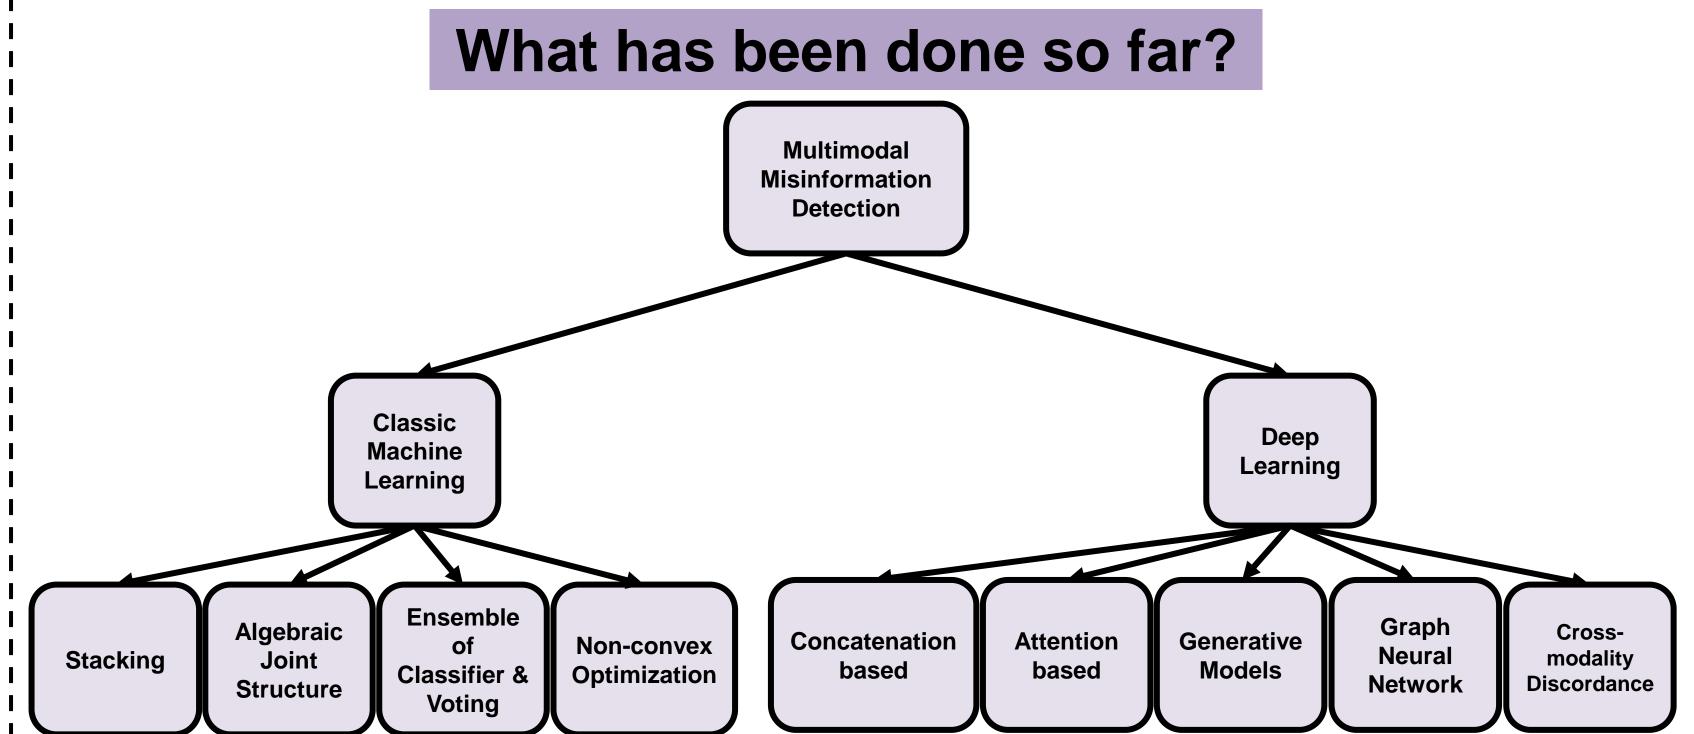

## Our concatenation-based architecture

- \* Concatenation-based models are easy to implement and result in admissible accuracy.
- we use BERT for encoding text and Inception network for encoding image.

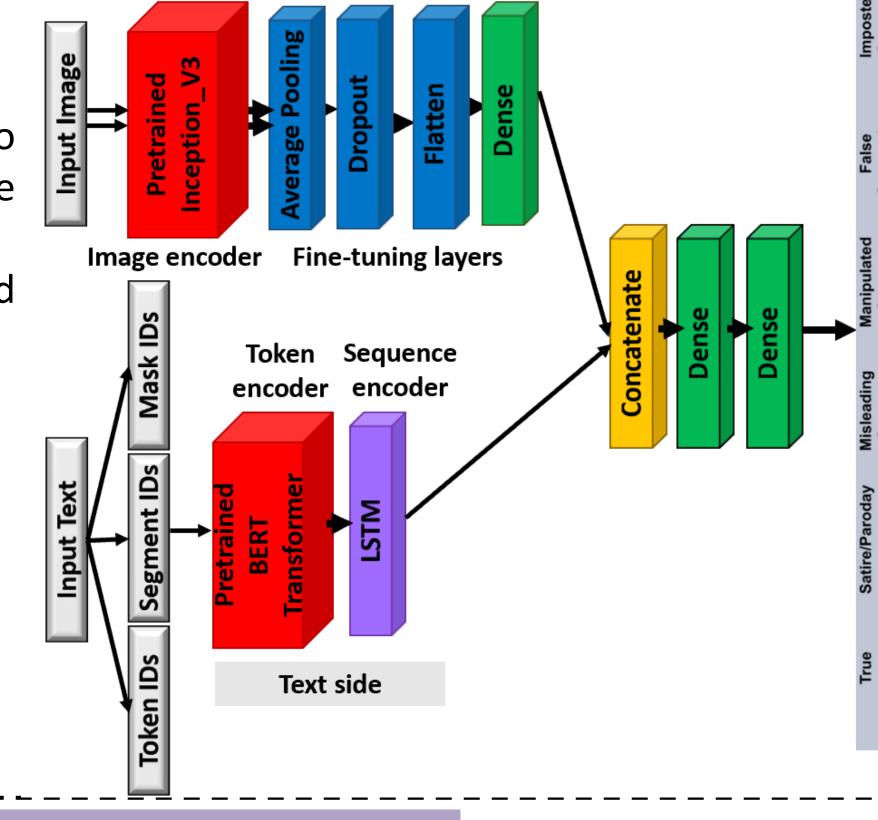


Image side

## Dataset & Examples

❖ Fakeddit is a dataset collected from Reddit, a social news and discussion website. Fakeddit consists of over 1 million submissions from 22 different subreddits posted from 3/19/2008 to10/24/2019 by over 300,000 users.



Image is taken from: Nakamura, K., Levy, S., & Wang, W.Y. (2020). Fakeddit: A New Multimodal Benchmark Dataset for Fine-grained Fake News Detection. *LREC*.

## **Preliminary Results**

Model	Training size	Test Size	Accuracy
Concatenation-based	57689	49388	0.85
Multimodal VAE	57689	49388	0.70

our survey on multimodal misinformation detection.

